

LLSGS-LED

Linear Square Strip. Available in 4 Color Temperatures.

Body Material: Heavy Gauge Die Formed Steel

Lens: Square Frosted Acrylic.

Finishes: White (WH) Standard. Custom Colors (CC) Available by Special Request.

Mounting:


- Pendant Mount Can be mounted individually or in continuous runs.
- Surface Mount- *Aircraft Cables Available by Request.*

Electrical:

- 120~277V, Select Lumens Per Foot. 80 CRI
- Power Factor ≥ 0.90
- THD: Less Than 20%

Notes/Certifications/Warranty:

- Universal Voltage: 120~277V
- UL Listed Class P Thermally Protected LED Drivers
- UL Certified Damp Locations
- FCC Compliant
- RoHS Compliant
- BAA Compliant
- 50K Life Hours
- 5 Year Limited Warranty

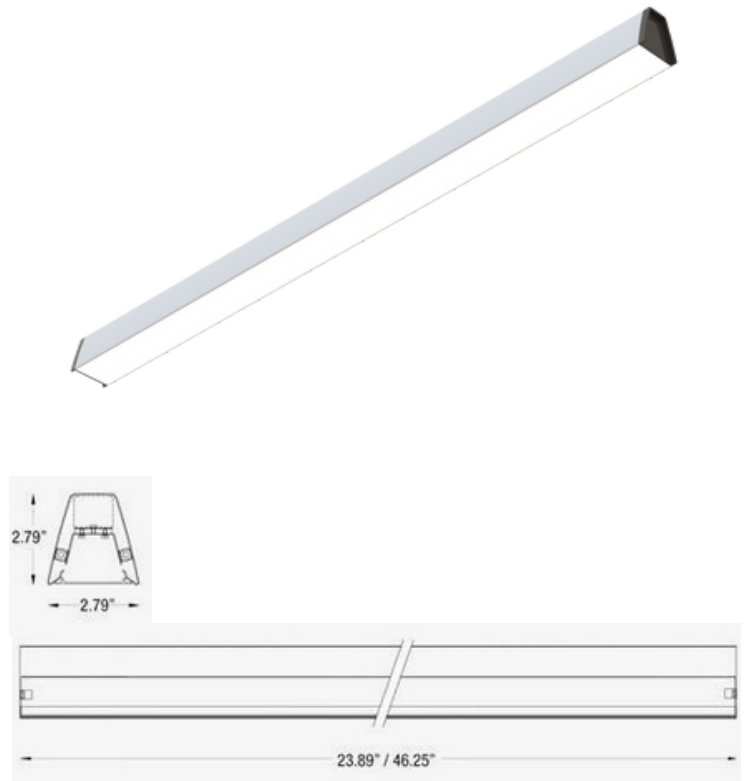

Ordering Information

PART #	LENGTH	LUMENS	COLOR TEMP	FINISH	OPTIONS
LLSGS-LED	2 2 Foot 4 4 Foot 6 6 Foot 8 8 Foot	LFxx Select a lumen per foot between 200 and 2900	30K 35K 40K 50K	WH WHITE BK Black CC Custom Color (Provide RAL)	O Grounded outlet EM10 10W Emergency driver 9 90CRI OCC-E External Occupancy Sensor OCC-I Internal Occupancy sensor BI-LEV Bi-level dimming system TOG Toggle Switch PULL Pull chain switch PRIS Prismatic lens C+P Cord & plug WG Wiregaurd Relay Relay system for daisy chaining AC4 4' Adjustable Aircraft Cable AC8 8' Adjustable Aircraft Cable