

# LLXS

## Compact Thermoplastic Exit Sign

### Housing:

- Injection-molded, 5VA flame retardant, high-impact resistant, thermoplastic
- EZ snap-out chevron directional indicators.

**Finish:** White (WH) or Black (BLK)

### Faces:

- Universal Single/Double Face Standard

### Illumination:

- Red, Green or field selectable Red/Green EXIT Illumination

### Electrical:

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Mounting:

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.

### Options:


- EM: Emergency Battery- 90 Minute Run Time
- SDT<sup>1,2</sup>: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.
- CW<sup>3</sup>: Custom Wording available
- USA: Assembled in the USA

### Warranty/Certifications:

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



### DIMENSIONS

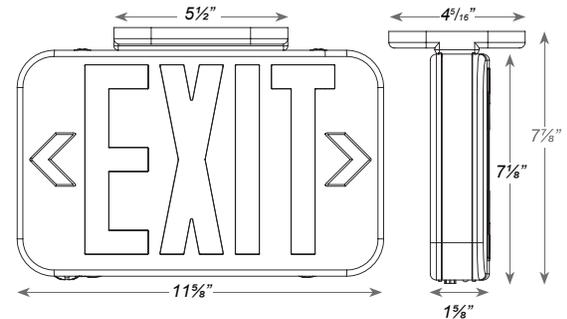

### Electrical Information:

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
LLXS-RED/GREEN EM	1.0	1.0	0.1	0.1
LLXS-RED SDT	2.5	2.5	0.05	0.05
LLXS-GREEN SDT	2.7	2.7	0.05	0.05

## Ordering Information

Part#	Letter Color	Finish	Battery	Options
LLXS	R Red G Green RGFS Field Selectable Red/Green	WH BLK	Blank AC Only (STD) EM: Emergency Battery	SDT Self Diagnostics <sup>1,2</sup> CW Custom Wording <sup>3</sup> USA Assembled in USA

<sup>1</sup> Only Available with EM Units


<sup>2</sup> Not Available in RG Option

<sup>3</sup> MOQ and Longer Lead times may apply

**Replaces the  
LLEZRXTEU  
effective 8/2023**


### VANDAL SHIELD PSC-1

- High-Impact Resistant Polycarbonate
- Includes Mounting Hardware

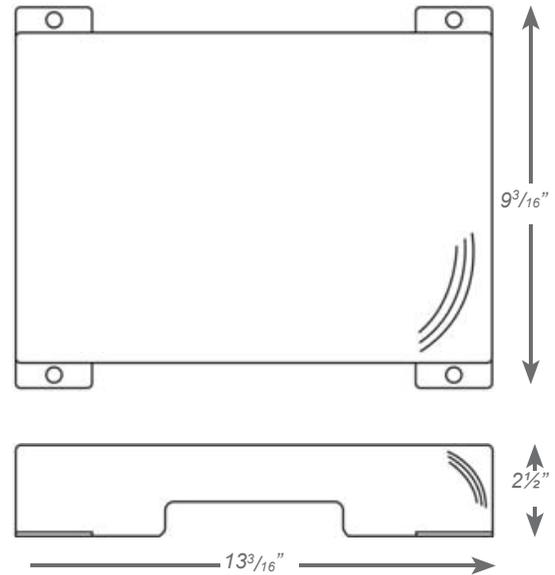

### WIRE GUARD WG-1

- Durable 9-Gauge Steel Construction.
- Includes Mounting Hardware

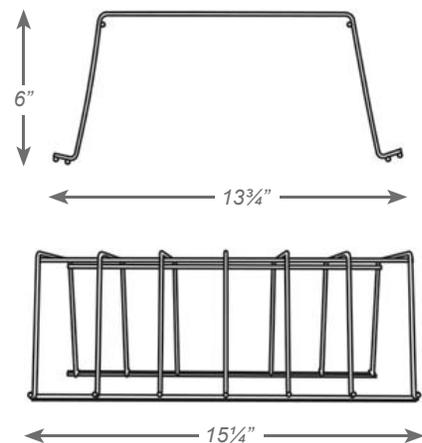

**Part #**

PSC-1  
WG-1