

LLCOL-30W-3MCT-BLK

LLCOL-3WS-3MCT-BLK

Colonial Post Top in Black

Materials:

Body Material: Heavy Duty Die-Cast Aluminum Housing with Anti-UV Polyester Coating

Lens: Anti-UV Frosted Tempered Glass IES/ NEMA Type 5 Lens.

Dimensions: 13.80"L x 13.80"W x 24.92"H

Electrical:

- 120~277V
- 0-10V Continuous Dimming.
- Input Frequency: 50/60 Hz
- 30W Engine 3150lms
- 3WS: Selectable Wattage
 - 30W/3150lm
 - 60W/6300lm
 - 100W /10500lm
- Lumens Per Watt: 105lm/W
- 3 MCT: Selectable Color Temperature: 30K, 40K, 50K
- Efficacy: 105lm/W
- Power Factor: >0.9
- Total Harmonic Distortion (THD): <15%
- CRI: >70

See Ordering Section for Lumen Notes

Controls: NEMA 3-Pin Photocell Sensor Cap Included


Mounting: Includes 3-inch Slip-Fit Pole Mounting Base

Notes/Certifications/Warranty:

- Operating temperatures -40°F to 113°F (-40°C to 45°C)
- UL certified to meet US and Canadian standards
- Wet Location Rated
- FCC Compliant
- RoHS Compliant
- 50K Life Hours
- 5 Year Limited Warranty



DIMENSIONS

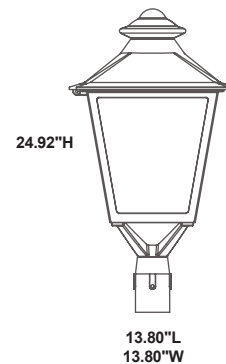

Photocell Sensor



30W 3-CCT and Tunable
100W Max Models include
Photocell Sensor

PART #	NOTES
LLCOL-30W-3MCT-BLK	30 Watt (3150lms) 3 MCT: 30K/40K/50K
LLCOL-3WS-3MCT-BLK	3 Watt Selectable: 30W (3150lm), 60W (6300lm), 100W (10500lm) 3 MCT: 30K/40K/50K