

## LLCOM-3-DB

Direct burial 3" commercial aluminum post. Smooth and fluted styles in 8', 10', 12' and 14'. Available in black, white, and bronze.

**Wall Thickness:** 0.125 in

**Butt Diameter:** 3 in

**Top Outer Diameter:** 3 in

**Base Diameter:** 3 in


**Net Weight:** 19 lbs

**Luminary Weight:** 100 lbs

**Hand Hole:** Standard on 12' and 14' Poles poles.


2" x 4" with Cover (hardware, tamper proof screws, & ground wire included)

POST LENGTH	SUGG. BURIAL DEPTH
8'	18"
10'	24"
12'	24"
14'	30"



.125" Wall Thickness  
Straight Aluminum  
Tube Wall Alloy  
6063-T6

AAMA 2603 Textured  
Powder Coat Finish  
Black, White, or  
Bronze

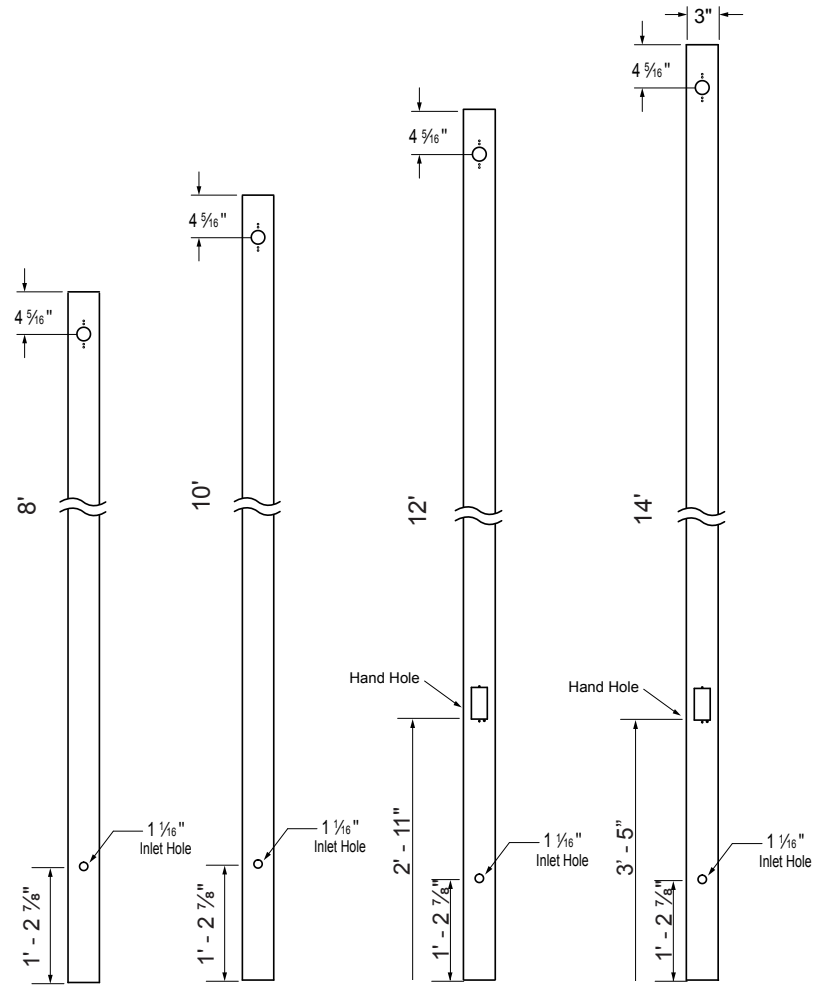

### Ordering Information

Part #	Length	Finish	OPTIONS
LLCOM-3-DB-S Smooth Aluminum Extruded Pole	8= 8' Pole 10= 10' Pole 12= 12' Pole 14= 14' Pole	BLK- Black WHT- White BRZ- Bronze	HH- Hand Hole (8' and 10' Poles only. Standard on 12' and 14' Poles)
LLCOM-3-DB-F Fluted Aluminum Extruded Pole			

### Maximum EPA (ft<sup>2</sup>)

Length	110 MPH	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH
8'	4.75	4.25	3.75	3.25	2.50	2.00	1.75	1.50	1.00
10'	3.25	3.00	2.50	2.00	1.50	1.25	1.00	0.75	0.50
12'	2.25	2.00	1.75	1.25	0.75	0.50	0.25	N/A	N/A
14'	1.50	1.25	1.00	0.50	0.25	N/A	N/A	N/A	N/A